


SS TRIM SYSTEM

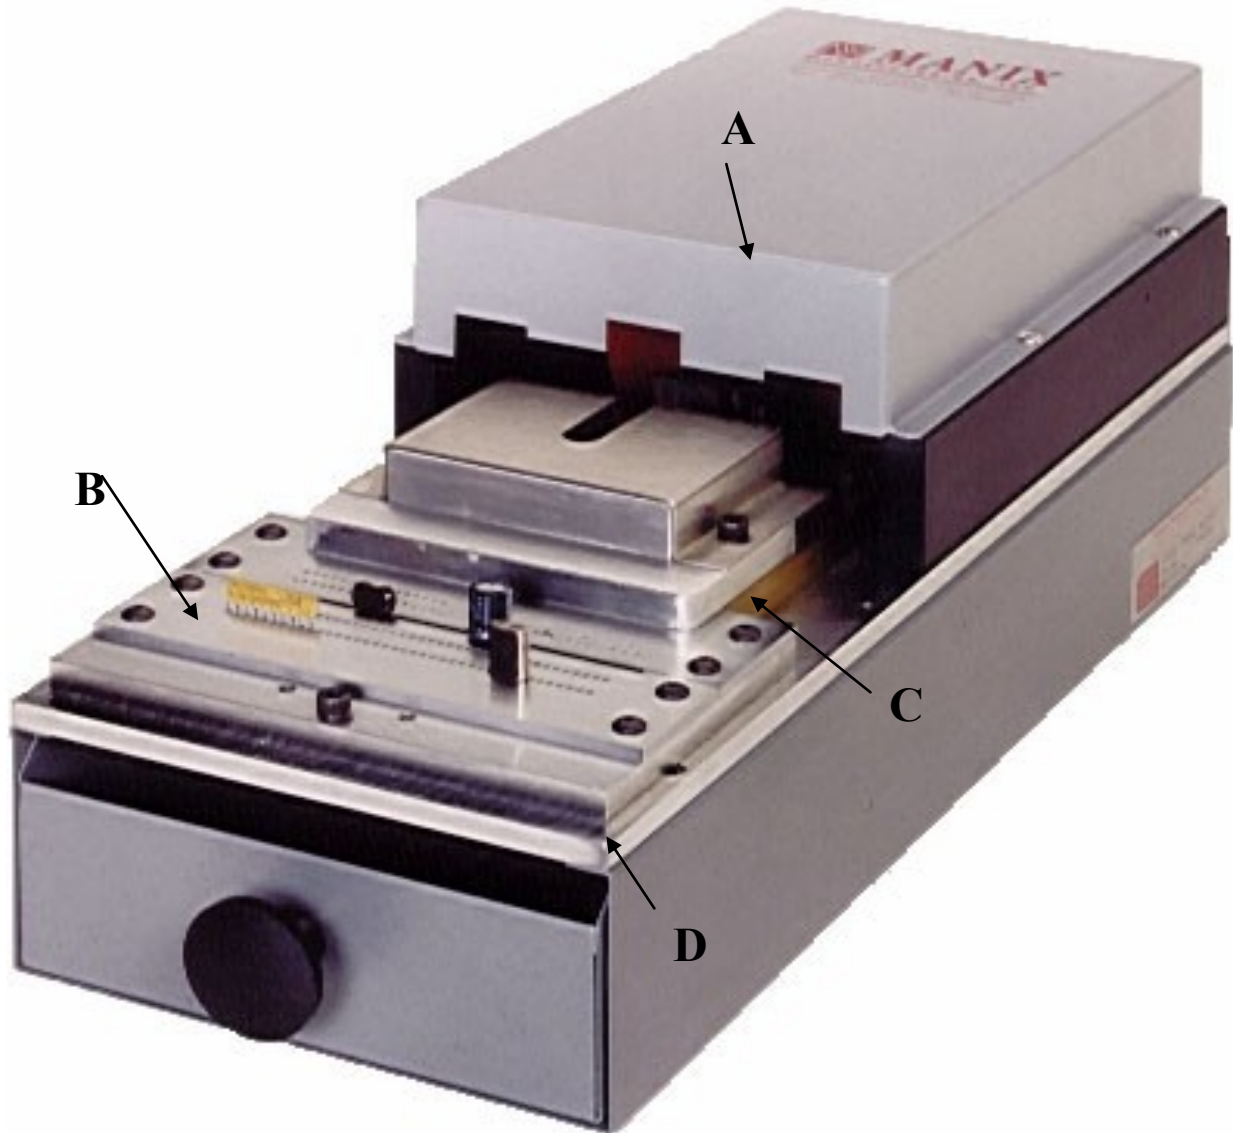

The SS Trim System is comprised of four major components.

- A. SS-1A-1-2 base system with 1” stroke cylinder, 2” bore and foot pedal
- B. Trim plate which can be fabricated to your specification or use your existing trim plates from your RLC-12.
- C. Cutter blade which rides below the trim plate.
- D. A U-Channel that guides the cutter blade ensuring no left to right movement and the mechanism to attach the trim plates via 4 socket head cap screws.

To change plates, simply turn off the air supply and loosen/ remove 4 socket head cap screws and replace the trim plate.